


Highlead Sewing

GM288

These overlock and safety stitch machines are available for a wide variety of sewing applications. Equipped with ball bearings and/or needle bearings they run quiet and smooth at high speeds. A fully enclosed lubrication systems ensures a long service life. The silicon oil needle cooling device as well as a knob type stitch regulator and fine adjustment capabilities of the differential feed dog are standard features on all subclasses. These machines can be used to sew such products as innerwear, polo shirts, knitwear, sweaters and jeans.

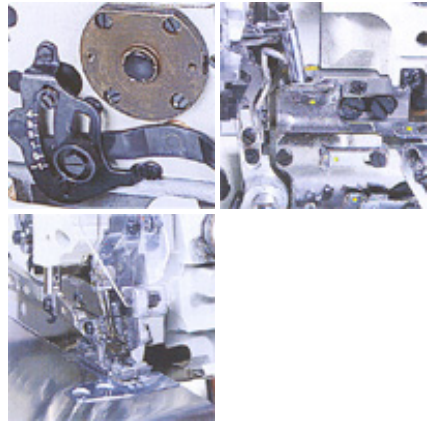

Model	Application	Number of Needles	Number of Threads	Stitch Code	Stitch Length	Stitch Length	Needle Gauge	Differential Ratio	Presser Foot Lift	Max Sewing Speed
GM288-2	Butted seaming for dyeing	1	2	503	1.0-3.6mm	7mm	-	0.8-1.9	6.5mm	6500r.p.m.
GM288-3	Standard	1	3	504	1.0-3.6mm	4mm	-	0.8-1.9	6.5mm	6500r.p.m.
GM288-4	Standard	2	4	514	1.0-3.6mm	6.2mm	2.2mm	0.8-1.9	6.5mm	6500r.p.m.
GM288-4	Standard	2	4	514	1.0-3.6mm	7mm	2.2mm	0.8-1.9	6.5mm	6500r.p.m.
GM288-5	Standard	2	5	516	1.5-3.6mm	7mm	3mm	0.8-1.9	6.5mm	6500r.p.m.
GM288-6	Standard	3	6	543	1.5-3.6mm	10mm	4.8mm	0.8-1.9	6.5mm	6500r.p.m.

GM288-301	Heavy duty overlock	1	3	504	1.0-3.6mm	5mm	-	0.8-1.9	6.5mm	6500r.p.m.
GM288-301	Heavy duty overlock	1	3	504	1.0-3.6mm	5mm	-	0.8-1.9	6.5mm	6500r.p.m.
GM288-302	Blind hemming	1	3	505	1.0-3.6mm	4mm	-	0.8-1.9	6.5mm	6500r.p.m.
GM288-303	Back latching	1	3	504	1.0-3.6mm	4mm	-	0.8-1.9	6.5mm	6500r.p.m.
GM288-3D	Auto thread trimming	1	3	504	1.0-3.6mm	4mm	-	0.8-1.9	6.5mm	6500r.p.m.
GM288-304	Fine edging	1	3	504	1.0-3.6mm	2mm	-	0.8-1.9	6.5mm	6500r.p.m.
GM288-401	Tape inserting	2	4	514	1.0-3.6mm	6.2mm	2.2mm	0.8-1.9	6.5mm	6500r.p.m.
GM288-402	Back latching	2	4	514	1.0-3.6mm	4mm	2.2mm	0.8-1.9	6.5mm	6500r.p.m.
GM288-403	Docket seaming	2	4	401	1.0-3.6mm	-	4.8mm	0.8-1.9	6.5mm	6500r.p.m.
GM288-4D	Auto thread trimming	2	4	514	1.0-3.6mm	4mm	2mm	0.8-1.9	6.5mm	6500r.p.m.
GM288-501	Jeans overlock (14 oz.)	2	5	516	1.5-3.6mm	9.8mm	4.8mm	0.8-1.9	6.5mm	6500r.p.m.
GM288-502	Wide seam jeans overlock (14 oz.)	2	5	516	1.5-3.6mm	11.8mm	4.8mm	0.8-1.9	6.5mm	6500r.p.m.
GM288-503	Medium heavy duty overlock	2	5	516	1.5-3.6mm	7mm	3mm	0.8-1.9	6.5mm	6500r.p.m.
GM288-504	Wide seam medium heavy duty overlock	2	5	516	1.5-3.6mm	9.8mm	4.8mm	0.8-1.9	6.5mm	6500r.p.m.
GM288-505	Heavy duty overlock	2	5	516	1.5-3.6mm	9.8mm	4.8mm	0.8-1.9	6.5mm	6500r.p.m.

GM288-506	Wide seam heavy duty overlock	2	5	516	1.5-3.6mm	11.8mm	4.8mm	0.8-1.9	6.5mm	6500r.p.m.
-----------	-------------------------------	---	---	-----	-----------	--------	-------	---------	-------	------------